

DOMjudge team manual



Summary

This page gives a short summary of the system interface. The summary is meant as a quick introduction, to be able to start using the system. It is however strongly advised that your team reads the entire document. There are specific details of this contest control system that might become of importance when you run into problems. **BE WARNED!**

DOMjudge works through a web interface that can be found at <http://master/domjudge/team>. See figures 1 and 2 on the next page for an impression.

Reading and writing

Solutions have to read all input from 'standard in' and write all output to 'standard out' (also known as console). You will never have to open (other) files. See appendix A for some code examples.

Submitting solutions

You can submit solutions from the web interface:

Web interface

From your team page, <http://master/domjudge/team>, click the green **Submit** button in the menu bar. Select the file(s) you want to submit. By default, the problem is selected from the base of the (first) filename and the language from the extension. The web interface tries to auto-detect the main class (for Java and Kotlin) or the main file (for Python 2 and Python 3) from the file name. Double check that the guess is correct before submitting.

Viewing scores, submissions, etc.

Viewing scores, submissions and sending and reading clarification requests and replies is done through the web interface at <http://master/domjudge/team>.

End of summary

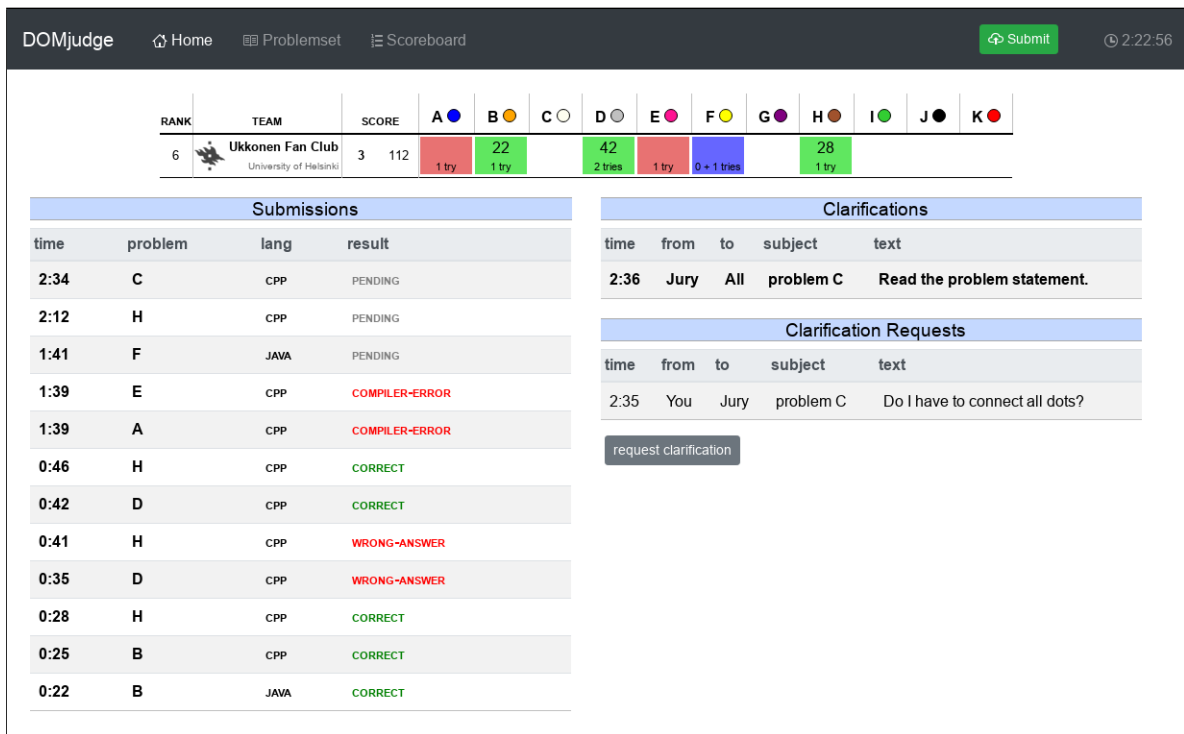


Figure 1: The team web interface overview page.

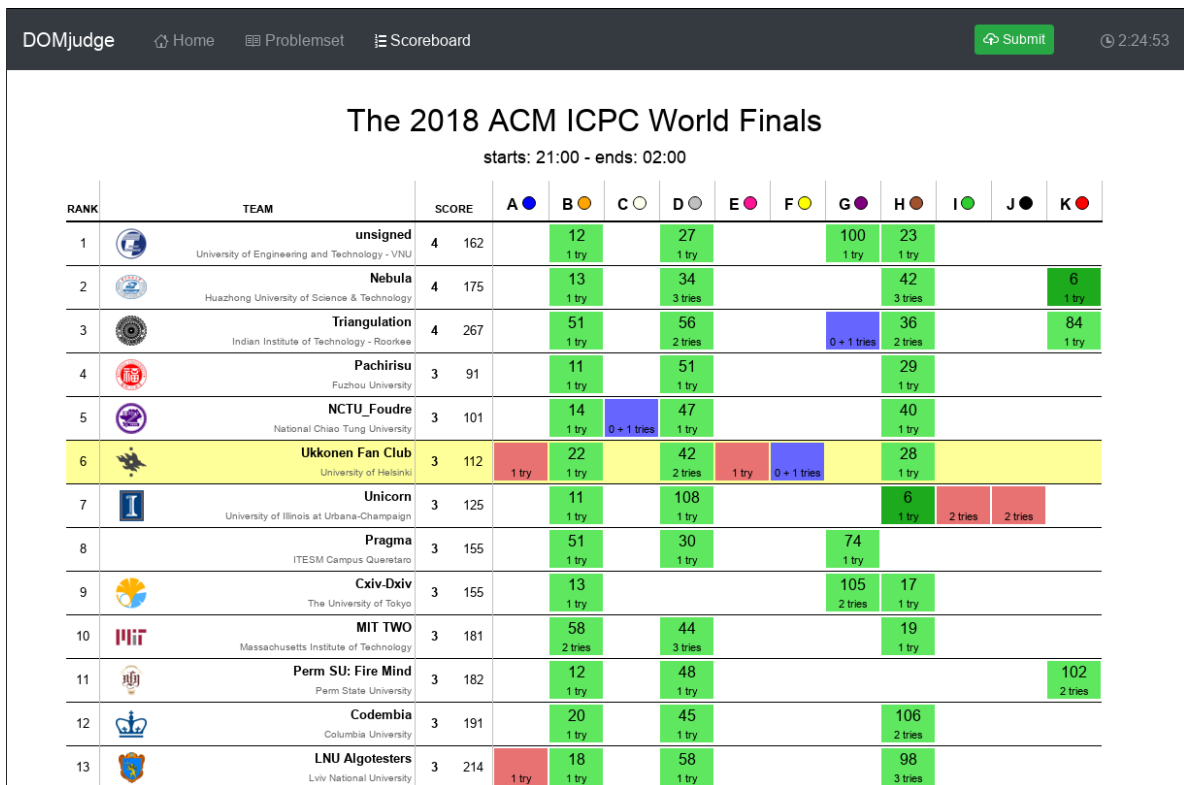


Figure 2: The scoreboard webpage.

1 Submitting solutions

1.1 Web interface

Solutions can be submitted from the web interface at <http://master/domjudge/team>. Click the green Submit button at the menu bar on every page. Click the file selection button and select one or multiple files for submission. DOMjudge will try to determine the problem, language and main class (in case of Java and Kotlin) or main file (in case of Python 2 and 3) from the base and extension of the first filename. Otherwise, select the appropriate values. Filenames must start with an alphanumerical character and may contain only alphanumerical characters and +. _-.

After you hit the submit button and confirm the submission, you will be redirected back to your submission list page. On this page, a message will be displayed that your submission was successful and the submission should be present in the list. An error message will be displayed if something went wrong.

2 Viewing the results of submissions

The left column of your team web page shows an overview of your submissions. It contains all relevant information: submission time, programming language, problem and status. The address of your team page is <http://master/domjudge/team>.

The top of the page shows your team's row in the scoreboard: your position and which problems you attempted and solved. Via the menu you can view the public scoreboard page with the scores of all teams. Many cells will show additional "title text" information when hovering over them. The score column lists the number of solved problems and the total time including penalty time. Each cell in a problem column lists the number of submissions, and if the problem was solved, the time of the first correct submission in minutes since contest start. This is included in your total time together with any penalty time incurred for previous incorrect submissions. Optionally the scoreboard can be 'frozen' some time before the end of the contest. The full scoreboard view will not be updated anymore, but your team row will. Your team's rank will be displayed as '?'. Finally, via the top menu you can also view the list of problems and view/download problem texts and sample data, if provided by the judges.

2.1 Possible results

A submission can have the following results (not all of these may be available depending on configuration of the system):

CORRECT The submission passed all tests: you solved this problem! *Correct submissions do not incur penalty time.*

COMPILER-ERROR There was an error when compiling your program. On the submission details page you can inspect the exact error (this option might be disabled). Note that when compilation takes more than 30 seconds, it is aborted and this counts as a compilation error. *Compilation errors do not incur penalty time.*

TIMELIMIT	Your program took longer than the maximum allowed time for this problem. Therefore it has been aborted. This might indicate that your program hangs in a loop or that your solution is not efficient enough.
RUN-ERROR	There was an error during the execution of your program. This can have a lot of different causes like division by zero, incorrectly addressing memory (e.g. by indexing arrays out of bounds), trying to use more memory than the limit, etc. Also check that your program exits with exit code 0!
NO-OUTPUT	Your program did not generate any output. Check that you write to standard out.
OUTPUT-LIMIT	Your program generated more output than the allowed limit. The output was truncated and considered incorrect.
WRONG-ANSWER	The output of your program was incorrect. This can happen simply because your solution is not correct, but remember that your output must comply exactly with the specifications of the judges. See section 4.3 below for more details.
TOO-LATE	Bummer, you submitted after the contest ended! Your submission is stored but will not be processed anymore.

Note that the judges may have prepared multiple test files for each problem. DOMjudge will report back the first incorrect result as verdict.

3 Clarifications

All communication with the judges is to be done through clarifications. These can be found in the right column on your team page. Both clarification replies from the judges and requests sent by you are displayed there.

There is also a button to submit a new clarification request to the judges; you can associate a specific problem or one of the general categories to a request. This clarification request is only readable for the judges. The judges can answer specifically to your team or send a reply to everyone if it is relevant for all.

4 How are submissions being judged?

The DOMjudge contest control system is fully automated. Judging is done in the following way:

4.1 Submitting solutions

With the web interface (see section 1) you can submit a solution to a problem to the judges. Note that you have to submit the source code of your program (and not a compiled program or the output of your program).

On the contest control system your program enters a queue, awaiting compilation, execution and testing on one of the autojudges.

4.2 Compilation

Your program will be compiled on an autojudge machine running Linux. All submitted source files will be passed to the compiler which generates a single program to run. For Java and Kotlin the given main class will be checked; for Python 2 and Python 3 we do a syntax check using the `py_compile` module.

4.3 Testing

After your program has compiled successfully it will be executed and its output compared to the output of the judges. Before comparing the output, the exit status of your program is checked: if your program exits with a non-zero exit code, the result will be a `RUN-ERROR` even if the output of the program is correct! There are some restrictions during execution. If your program violates these it will also be aborted with a `RUN-ERROR`, see section [4.4](#).

When comparing program output, it has to exactly match to output of the judges, except that some extra whitespace may be ignored (this depends on the system configuration of the problems). So take care that you follow the output specifications. In case of problem statements which do not have unique output (e.g. with floating point answers), the system may use a modified comparison function. This will be documented in the problem description.

4.4 Restrictions

To prevent abuse, keep the jury system stable and give everyone clear and equal environments, there are some restrictions to which all submissions are subjected:

- | | |
|----------------------------|---|
| compile time | Compilation of your program may take no longer than 30 seconds. After that, compilation will be aborted and the result will be a compile error. In practice this should never give rise to problems. Should this happen to a normal program, please inform the judges right away. |
| source size | The total amount of source code in a single submission may not exceed 256 kilobytes, otherwise your submission will be rejected. |
| memory | The judges will specify how much memory you have available during execution of your program. Note that this may vary per problem. This is the total amount of memory (including program code, statically and dynamically defined variables, stack, Java VM, ...)! If your program tries to use more memory, it will most likely abort, resulting in a run error. |
| number of processes | You are not supposed to explicitly create multiple processes (threads). This is to no avail anyway, because your program has exactly 1 processor core fully at its disposal. To increase stability of the system, DOMjudge executes submissions in a sandbox where a maximum of 15 processes can be run simultaneously (including processes that started your program). |

4. How are submissions being judged?

People who have never programmed with multiple processes (or have never heard of “threads”) do not have to worry: a normal program runs in one process.

A Code examples

Below are a few examples on how to read input and write output for a problem.

The examples are solutions for the following problem: the first line of the input contains the number of testcases. Then each testcase consists of a line containing a name (a single word) of at most 99 characters. For each testcase output the string "Hello <name>!" on a separate line.

Sample input and output for this problem:

Input	Output
3 world Jan SantaClaus	Hello world! Hello Jan! Hello SantaClaus!

Note that the number 3 on the first line indicates that 3 testcases follow.

A solution for this problem in C:

```
#include <stdio.h>

int main() {
    int i, ntests;
    char name[100];

    scanf("%d\n", &ntests);

    for (i = 0; i < ntests; i++) {
        scanf("%s\n", name);
        printf("Hello %s!\n", name);
    }
}
```

A. Code examples

A solution in C++:

```
#include <iostream>
#include <string>

using namespace std;

int main() {
    int ntests;
    string name;

    cin >> ntests;
    for (int i = 0; i < ntests; i++) {
        cin >> name;
        cout << "Hello " << name << "!" << endl;
    }
}
```

A solution in Java:

```
import java.util.*;

class Main {
    public static void main(String[] args) {
        Scanner scanner = new Scanner(System.in);
        int nTests = scanner.nextInt();

        for (int i = 0; i < nTests; i++) {
            String name = scanner.next();
            System.out.println("Hello " + name + "!");
        }
    }
}
```

A solution in Python:

```
import sys

n = int(input())
for i in range(n):
    name = sys.stdin.readline().rstrip('\n')
    print('Hello %s!' % (name))
```


A solution in Kotlin:

```
import java.util.*

fun main(args: Array<String>) {
    var scanner = Scanner(System.`in`)
    val nTests = scanner.nextInt()
    for (i in 1..nTests) {
        System.`out`.format("Hello %s!%n", scanner.next())
    }
}
```